

Wireless Aware Smart Switching

Wireless Switching Solution

- + Reliable Wireless Deployment Solution
- + Increases Installation Flexibility
- + DES-1228P and DWL-3140AP Work Together

Centralized Management of Wireless Network

- + Provides Scaled, Integrated Management Infrastructure
- + Centrally Manages User Authentication/Security Policies
- + Configures and Manage All Connected Access Points

Simplified, Scalable Network Deployment

- + 802.3af Power Over Ethernet Facilitates AP Installation
- + Wireless Access Points Can be Added Anytime As Needed

Switch

- + Provides Centralized Security/Management for WLAN Infrastructure
- + Automatically Configures & Manages All Attached AP
- + 24 10/100Mbps Ethernet Ports With 802.3af PoE
- + 4 10/10/1000Mbps Gigabit Uplinks (Including 2 Combo SFP)

Wireless Access Point

- + 802.11g Wireless Connectivity
- + Up to 108Mbps (Turbo Mode)
- + Supports 802.3af PoE
- + Smoke Detector Look-Alike, Can Be Mounted on Ceiling
- + WEP Data Encryption, WPA/WPA2

D-Link's Wireless Aware Smart Switching is an inexpensive-to-own, easy-to-use solution designed to let small businesses deploy a company-wide wireless network with reliable connectivity and enhanced security. Easy to install, manage and expand, it offers a cost-effective alternative to the more complex wireless switch controller solutions used by enterprises, while providing businesses with the flexibility and benefit of wired/wireless network convergence.

Centrally Managed/Easily Expandable Wireless Network

A basic Wireless Aware Smart Switching system consists of one switch (a DES-1228P PoE Smart Switch) and up to 24 wireless access points (the DWL-3140AP Wireless 108G Web Smart Thin AP with PoE) directly connected to the switch, and management software called Smart WLAN Manager. The DES-1228P switch acts as the core unit that manages the 24 outlying units (the DWL-3140AP access points). Wireless access points can be scattered around a network site closed to users, while the switch can be placed in a centralized equipment room. Switches and access points can be gradually added to the network site as the number of wireless users grows. This scalable expansion provides businesses with the ability to gradually add network capacity on a per-need basis.

Simplified Configuration/Management

The system provides quick discovery of switches and APs, an AP mapping utility, full-time AP status controls and the ability to maintain all AP traffic history and generate reports with statistical diagrams. Configuring and managing the wireless access points is through a Windows-based utility called Smart WLAN Manager running on a PC connected to the network. This utility provides self-discovery of all Smart switches connected to

the network. It lists them and the access points connected to each switch on the PC screen. From here, the network administrator can monitor all AP and wireless client status in the same integrated graphic interface.

To simplify configuration and firmware upgrade, Smart WLAN Manager allows administrators to apply profiles containing wireless and security settings, and firmware upload to a group of AP, dispensing them of the need to repeat the same process for each individual AP. It also allows backup and restoration of the wireless network database on the PC.

Topology View

An office or factory floor plan can be uploaded to the Topology View, and switch and AP icons can be placed on the Topology View Map, so the locations of the managing and wireless devices can be seen on the PC screen. Administrators can click on an icon to configure and view the device. If and when an AP is down, they can instantly locate the failed device and replace it with a new one.

AP Load Balancing

SSID can be set for access points for user access, security and roaming purposes. Smart WLAN Manager allows access points with identical SSID to be grouped together for load balancing to share traffic load. Each AP within the group will limit its access to a specific number of users, thereby guaranteeing a minimum bandwidth for each client. AP load balancing eliminates traffic bottlenecks in case of any sudden surge in the number of concurrent wireless connection at peak usage time. Combining this function with the access points' 108Mbps Turbo mode throughput, the system ensures a significant improvement of overall wireless network performance.

DWL-3140AP Wireless 108G Access Point With PoE



DES-1228P 24-port Ethernet Switch With PoE

Wireless Aware Smart Switching

AP Monitoring

Smart WLAN Manager provides a List View, Tree View and Visual View of all monitored access points and periodically updates their status on the screen of the managing station. Administrators can thus check the status of the connected AP and their wireless clients, find out which AP is connected to which switch port, and see AP utilization traffic and load balance statistics in graphic diagrams. For reporting and planning purposes, the monitored statistics can be exported to Excel and PDF formats. A client connection log provides all connection status of wireless clients.

Easy Deployment/PoE Support

The DES-1228P switch has standard rack-mount design and can be hidden in a wiring closet, while the DWL-3140AP access points have camouflage smoke detector design and can be concealed on ceilings. The DWL-3140AP supports 802.3af standard PoE, while each the 24 Ethernet ports of the DES-1228P switch provides 802.1af PoE power, allowing the access points to be deployed at difficult places such as on high walls and ceilings, where AC power outlets are not readily available. By transmitting remote power through the standard network cabling inside the walls and

ceilings, a centralized power source is provided, eliminating the need for individual power sources for these devices. Supporting 802.3af standard, the DES-1228P switch provides the additional convenience for IP cameras, IP telephones and other 802.3af-compliant devices to connect to through its ports.

Flexible Wired/Wireless Connection

Converged LAN/WLAN deployment means all restrictions on port usage are removed: any port on the DES-1228P switch can be used for wired or wireless purposes - that is, connected to either a wireless access point or to the wired LAN structure. For LAN connection, the DES-1228P provides 4 Gigabit uplinks to the network backbone/servers, and extensive software features to enhance a wired network's security and performance. These features include IGMP snooping, port mirroring, Spanning Tree, port trunks, 802.1Q VLAN traffic segmentation, 802.1p QoS, 802.1x port-based authentication, D-Link Safeguard Engine and SNMP management support.

FEATURES & BENEFITS

Wired/Wireless Access Switching Architecture	The wireless switching centralized architecture is composed of a DES-1228P PoE switch, which is the core unit that manages the network, and multiple DWL-3140AP access points, which deliver wireless connectivity to mobile clients and can be dispersed throughout the network. The Smart WLAN Manager provides each AP with configuration and security profiles to intelligently manage data traversing the wireless waves..
Centralized WLAN Management & Easy Deployment	Through a centralized management platform, network maintenance and configuration become a more efficient process. If any access point were to fail, administrators can instantly identify the location of the failed AP and immediately swap it out with another AP. The switch will automatically configure the new AP with the same configuration as the previous unit.
Maximum Network Protection	Each client connecting to the wireless network goes through an authentication process to ensure maximum security. Whether the client is an assigned user, a visiting guest, or just has department access, the system protects the entire network infrastructure with its numerous security protocols. These protocols include WEP data encryption, WPA/WPA2 and 802.1x user authentication security.
Gigabit Support for Network Backbone/Server Attachment	The PoE switch's Gigabit ports allow the wireless network to integrate with the network backbone and servers. These ports support combo 10/100/1000BASE-T and SFP connections, providing the flexibility for installing copper and fiber Gigabit uplinks.
802.3af Standard PoE Support for Easy Deployment	For installation sites, access points typically need to be placed at out-of-the-way locations such as on the ceilings or rooftops for maximum coverage. It is at these locations where wall AC outlets are inaccessible, and extending power lines to these places is difficult and expensive. By transmitting remote power through the standard network cabling inside the walls and ceilings, a centralized power source is provided, eliminating the need for individual power sources for these devices.

¹ Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead may lower actual data throughput rate.

Wireless Aware Smart Switching

Technical Specifications

DES-1228P PoE Web Smart Switch

Number of Ports	<ul style="list-style-type: none"> + 24 10/100BASE-TX ports with 802.3af PoE + 2 10/100/1000BASE-T ports + 2 combo 10/100/1000BASE-T/SFP ports
L2 Features	<ul style="list-style-type: none"> + IGMP snooping + 802.1D Spanning Tree + Port trunk (Link Aggregation): up to 6 groups per device, up to 8 ports per group + Port mirroring
VLAN	<ul style="list-style-type: none"> + 802.1Q VLAN standard (VLAN Tagging) + Up to 256 static VLAN groups
QoS (Quality of Service)	<ul style="list-style-type: none"> + 802.1p Priority Queues standard + Up to 4 queues per port + Supports WRR mode in queue handling
Security	<ul style="list-style-type: none"> + 802.1X port-based access control + Broadcast Storm Control + D-Link Safeguard Engine
Management	<ul style="list-style-type: none"> + Web-based GUI or SmartConsole Utility + SNMP support + DHCP client + Trap setting for destination IP, system events, fiber port events, twisted-pair port events + Port access control + Web-based configuration backup/restoration + Web-based firmware backup/upload + Firmware upgrade using SmartConsole Utility + LLDP + Anti-Rogue AP
MIB	<ul style="list-style-type: none"> + RFC 1213 MIB-II + D-Link Enterprise Private MIB
Switch Capacity	12.8Gbps
MAC Address Table	8K entries per device
MAC Address Update	<ul style="list-style-type: none"> + Up to 256 static MAC entries + Enable/disable auto-learning of MAC addresses
RAM Buffer	128KBytes per device
AC Input	100 to 240 VAC 50/60Hz internal universal power supply
Power Consumption	222 watts
Dimensions	<ul style="list-style-type: none"> + 440 x 209 x 44 mm (17.32 x 8.23 x 1.73 inches) + 19-inch standard rack mounting width, 1U height
Weight	3.20 kg (7.05 lbs)
Heat Dissipation	757.51 BTU/hr
Operating Temperature	0° to 40° C (32° to 104°F)
Storage Temperature	-10° to 70° C (14° to 158°F)
Operating Humidity	10% to 90% non-condensing
Storage Humidity	5% to 90% non-condensing

Wireless Aware Smart Switching

Emission (EMI)	+ FCC Class A
Safety	+ CSA

DWL-3140AP Wireless 108G Web Smart Thin AP with PoE

Standard	802.11b/g
Wireless Frequency Range	+ 802.11b: 2400 to 2497MHz ISM band + 802.11g: 2400 to 2483.5MHz ISM band
Modulation	+ 802.11g: OFDM (BPSK, QPSK, 64-QAM) + 802.11b: DSSS (DBPSK, DQPSK, CCK)
Frequency Channels	+ 1 to 11 channels (North America) + 1 to 13 channels (Europe)
Receive Sensitivity	+ 802.11b: 11Mbps CCK (8% PER): -82dBm 6Mbps OFDM (10% PER): -88dBm 5.5Mbps CCK (8% PER): -85dBm 2Mbps QPSK (8% PER): -86dBm 1Mbps BPSK (8% PER): -89dBm + 802.11g: 54Mbps OFDM (10% PER): -68dBm 48Mbps OFDM (10% PER): -68dBm 36Mbps OFDM (10% PER): -75dBm 24Mbps OFDM (10% PER): -79dBm 18Mbps OFDM (10% PER): -82dBm 12Mbps OFDM (10% PER): -84dBm 9Mbps OFDM (10% PER): -86dBm 6Mbps OFDM (10% PER): -88dBm
EIRP	18dBm typically
Date Rates (With Auto-Fallback)	+ 802.11b: 11, 5.5, 2 and 1Mbps + 802.11g: 54, 48, 36, 24, 18, 12, 9 and 6Mbps + Turbo mode: 108Mbps
Antenna	Internal omni-directional antenna
Wireless data encryption	64/128/152-bit WEP standard
Wireless Security	+ WPA + WPA-PSK + WPA2 + WPA2-PSK

Wireless Aware Smart Switching

Management	D-Link Smart WLAN Manager
Ethernet Interface	10/100BASE-TX port
Stand-Alone Power (Without PoE)	Power Voltage: DC:5V/1A (Connection Through External Power Adapter)
Power Over Ethernet	+ AP Connects to Switch's PoE Port + PoE Standard: 802.3af + Input Voltage: 44 to 57 VDC
Diagnostic LEDs	+ Power/Status + LAN Link/Activity + WLAN Link/Activity
Dimensions	118 mm (diameter) x 35 mm (H) (4.649 x 1.379 inches)
Weight	120 grams (0.264 lb)
Operating Temperature	0° to 40° C (32° to 104°F)
Storage Temperature	-20° to 55° C (-4° to 135°F)
Operating Humidity	5% to 95% non-condensing
Storage Humidity	5% to 95% non-condensing
Emission (EMI)	FCC Class B

The screenshot displays the D-Link Smart WLAN Manager web interface. The main content area shows a table of monitored access points. The table has columns for Status, Name, IP, MAC, SSID, Channel, and Firmware Version. All listed APs are in an 'Online' status. A left-hand navigation menu includes options like Monitor, AP, Client, Summary, Group, Utilization, Firmware Upgrade, Log, and Switch Discover Utility. At the bottom, there are tabs for System Log and Action Log, and a status bar showing 'Remaining time to next polling: 12s'.

Status	Name	IP	MAC	SSID	Channel	Firmware Version
Online	AP_15	192.168.1.113	00:19:58:45:BD:...	dlink	1	1.00.0016
Online	AP_14	192.168.1.112	00:19:58:45:BD:...	dlink	1	1.00.0016
Online	AP_13	192.168.1.114	00:19:58:45:BD:...	dlink	1	1.00.0016
Online	AP_11	192.168.1.110	00:19:58:45:BD:...	dlink	1	1.00.0016
Online	AP_12	192.168.1.111	00:19:58:45:BD:...	dlink	1	1.00.0016
Online	AP_18	192.168.1.118	00:19:58:45:BD:...	dlink	11	1.00.0016
Online	AP_20	192.168.1.119	00:19:58:45:BD:...	dlink	1	1.00.0016
Online	AP_19	192.168.1.117	00:19:58:45:BD:...	dlink	1	1.00.0016
Online	AP_16	192.168.1.116	00:19:58:45:BD:...	dlink	11	1.00.0016
Online	AP_17	192.168.1.115	00:19:58:45:BD:...	dlink	11	1.00.0016
Online	AP_3	192.168.1.104	00:19:58:45:BD:...	dlink	1	1.00.0016
Online	AP_5	192.168.1.102	00:19:58:45:BD:...	dlink	11	1.00.0016
Online	AP_1	192.168.1.103	00:19:58:45:BD:...	dlink	1	1.00.0016
Online	AP_2	192.168.1.100	00:19:58:45:BD:...	dlink	6	1.00.0016
Online	AP_4	192.168.1.101	00:19:58:45:BD:...	dlink	1	1.00.0016
Online	AP_10	192.168.1.108	00:19:58:45:BD:...	dlink	11	1.00.0016
Online	AP_9	192.168.1.109	00:19:58:45:BD:...	dlink	11	1.00.0016
Online	AP_8	192.168.1.106	00:19:58:45:BD:...	dlink	1	1.00.0016
Online	AP_6	192.168.1.105	00:19:58:45:BD:...	dlink	1	1.00.0016

Listing of Monitored Access Points

Wireless Aware Smart Switching


Smart WLAN Manager

Central AP Management	Monitor AP status and setting in the same integrated UI
D-Link Smart Console	Supports SmartConsole protocol (based on multicast) to manage D-Link Smart switches
AP Group Management	Maintains a set of setting templates for settings in multiple APs
Log	<ul style="list-style-type: none"> + System log + Operator action log + SNMP trap log of AP and switch
Syslog Alert	<ul style="list-style-type: none"> + BSD SYSlog client + Adjusts send SYSlog frequency and SYSlog condition
Email Alert	<ul style="list-style-type: none"> + Email client + Adjustable email frequency and email condition
Central Firmware Upgrade (AP and Switch)	<ul style="list-style-type: none"> + Selects multiple APs and upgrades their firmware at same time + Selects multiple switches and upgrade their firmware at same time
Device Status	Summarizes abnormal status in alert window
Configuration Backup/Restore	<ul style="list-style-type: none"> + Backups all monitored device settings + Restores all monitored device settings back to system
Password Management	<ul style="list-style-type: none"> + Sets AP password + Sets switch password + Sets system management password
AP With Key Management	<ul style="list-style-type: none"> + Sets authentication key for AP + Sets authentication key for switch
AP Topology Monitoring	<ul style="list-style-type: none"> + Lists monitored devices with Tree view, List view, Visual view + Periodically updates device status
Zero Configuration	One-click technology to restore damaged AP's setting to its replacement
AP Life Check	Real-time tracking monitored AP's status
AP User Statistics	Maintains all wireless clients' connection history and depicts statistics in diagrams
AP Traffic Statistics	Maintains all AP's traffic history and depicts statistics in diagrams
Export Statistics Formats	<ul style="list-style-type: none"> + CSV format + PDF format
AP Load Balancing	Sets a group of managed APs to share loading
Minimum System Requirements	<ul style="list-style-type: none"> + Ethernet network interface (for PC running Smart WLAN Manager software) + Windows 2000 or XP installed (for PC running Smart WLAN Manager software) + DHCP server

Wireless Aware Smart Switching

Optional SFP Transceivers

DEM-211	SFP transceiver, 100BASE-FX standard, multi-mode fiber, max. 2 km distance, 3.3V operating voltage
DEM-210	SFP transceiver, 100BASE-FX standard, single-mode fiber, max. 15 km distance, 3.3V operating voltage
DEM-310GT	SFP transceiver, 1000BASE-LX standard, single-mode fiber, max. 10 km distance, 3.3V operating voltage
DEM-311GT	SFP transceiver, 1000BASE-SX standard, multi-mode fiber, max. 550 m distance, 3.3V operating voltage
DEM-312GT2	SFP transceiver, 1000BASE-SX standard, multi-mode fiber, max. 2 km distance, 3.3V operating voltage
DEM-314GT	SFP transceiver, 1000BASE-LX standard, single-mode fiber, max. 50 km distance, 3.3V operating voltage
DEM-315GT	SFP transceiver, 1000BASE-LX standard, single-mode fiber, max. max. 80 km distance, 3.3V operating voltage
DEM-330T	WDM SFP transceiver, 1000BASE-LX standard, single-mode fiber, max. 10 km distance, 3.3V operating voltage, 1550 nm Tx wavelength, 1310 nm Rx wavelength
DEM-330R	WDM SFP transceiver, 1000BASE-LX standard, single-mode fiber, max. 10 km distance, 3.3V operating voltage, 1310 nm Tx wavelength, 1550 nm Rx wavelength
DEM-331T	WDM SFP transceiver, 1000BASE-LX standard, single-mode fiber, max. 40 km distance, 3.3V operating voltage, 1550 nm Tx wavelength, 1310 nm Rx wavelength
DEM-331R	WDM SFP transceiver, 1000BASE-LX standard, single-mode fiber, max. 40 km distance, 3.3V operating voltage, 1310 nm Tx wavelength, 1550 nm Rx wavelength

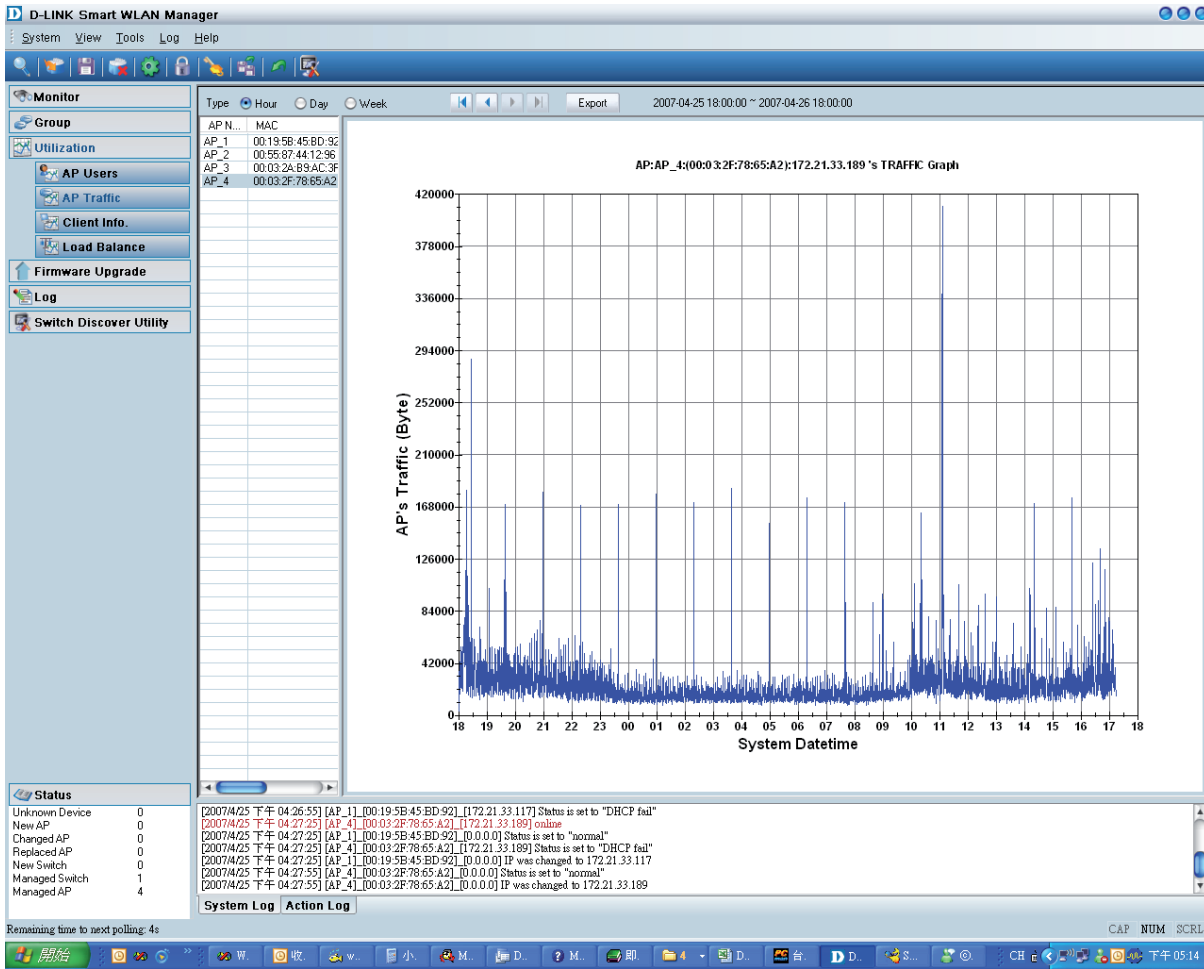

Monitored Access Point's Traffic Graph



Specifications subject to change without prior notice.
D-Link is a registered trademark of D-Link Corporation/D-Link System Inc.
All other trademarks belong to their proprietors.
Release 04 (Feb. 2008)