

D-Link[®]


USB 2.0 10/100 FAST ETHERNET ADAPTER
DUB-E100

**QUICK
INSTALLATION
GUIDE**

A large, light gray watermark of the D-Link logo is positioned diagonally across the page, behind the main text. The logo consists of a stylized 'D' with a white triangle inside it.

CONTENTS OF PACKAGING

CONTENTS



INSTALLATION CD

INCLUDES SOFTWARE DRIVERS & TECHNICAL MANUAL

USB 2.0 10/100 FAST ETHERNET ADAPTER

DUB-E100

If any of these items are missing from your packaging, please contact your reseller.

SYSTEM REQUIREMENTS

REQUIREMENTS

- Computer with Microsoft Windows® 7, Vista®, XP (Service Pack 2), or 2000; Mac OS; or Linux
- Available USB port
- At least 32 MB of memory

PRODUCT SETUP

DRIVER INSTALLATION


This driver installation process is for Windows 7, Vista, and XP. It might vary slightly for older Windows® operating systems. To install DUB-E100 on a Mac or Linux system, please refer to the DUB-E100 user manual on the Installation CD.

Windows 7, Vista, and XP

Step 1:

Insert the Installation CD into the CD drive. The DUB-E100 user interface menu screen will appear. Click on Install to begin the DUB-E100 driver installation. The InstallShield Wizard will appear and complete the installation.

Note: If the user interface does not start up, please browse to the Autorun folder in your PC's CD drive and open Autorun manually.

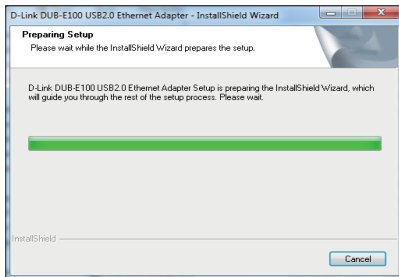

Step 2:

Once you have completed the driver installation, please continue to Hardware Installation on page 4.

PRODUCT SETUP

HARDWARE INSTALLATION

Step 1:

Plug the DUB-E100's USB cable into an available USB port on your computer.

Step 2:

Attach an Ethernet cable to the Ethernet port on the DUB-E100.

Step 3:

Attach the other end of the Ethernet cable to your network switch, hub, or router.

Step 4:

Windows will detect the new hardware and prompt you for the drivers.

For Windows 7 and Vista:

The driver software installation will start automatically.


For Windows XP:

The Found New Hardware Wizard box will pop up. Select **Yes, this time only** and click **Next** to continue.

On the next screen, choose the option to install the software automatically and click **Next** to continue. The driver software installation will then start automatically.

Installation Complete

When the installation of the DUB-E100 is complete, the LINK LED should be solid green, indicating a good physical connection between the DUB-E100 and the network. The TX/RX LED indicates when data is being transmitted or received. If both LEDs are unlit, there may be a problem with the physical connection. Check the cables between your DUB-E100, the computer, and the network. Verify that your network switch, hub, or router is powered on.

**Link LED**

Lights up solid green when the DUB-E100 has a good physical connection.

TX/RX LED

Flashes green when data is transmitted/received at 100 Mbps. When data is transmitted/received at 10 Mbps, the LED flashes amber.

NOTES